


THREADED BALL VALVE

Brass full bore NP 20/64

Art. 200.0300 Female female connections

Art. 200.0305 Male female connections



Art. 200.0300

Execution: brass 58 UNI 5705 body, sleeves, ball, ring, stuffing box and pivot - PTFE seats and gaskets - aluminium painted lever UNI 5076 - steel screw UNI 5771 - threaded ends female/female or male/female ISO 228/1 -full bore - 90°rotating handling - aluminium black-painted lever.


Diameters: 1/4" ÷ 4"

Working pressure 20/64 bar (see scheme)


Working temperature -20°C +120°C

Employments: water - mineral oils- air - non-aggressive fluids.

On request: with butterfly handle.

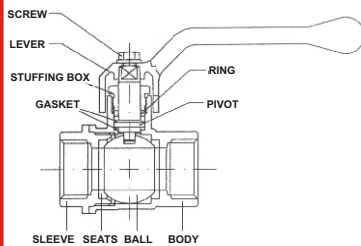

Sec.Art. 200.0300

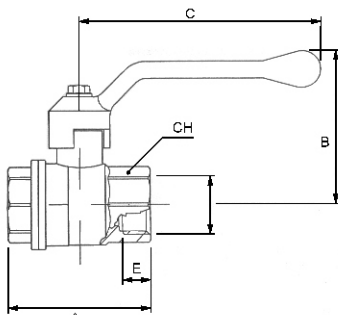

Sec.Art. 200.0300
Sec.Art. 200.0305

Sizes

Ø	A	A	B	C	E	CH	KV	PN
	Art.	Art.						
	200.0300	200.0305						
1/4"	42	50	52	85	9	17	5.4	64
3/8"	44	52	52	85	10	21	6	64
1/2"	50	59	54	85	11	25	16.3	64
3/4"	58	66	57	85	13	31	29.5	40
1"	69	78	78	130	15	38	43	40
1 1/2"	81	91	82	130	17	48	89	25
1 1/2"	94	101	104	155	18	54	230	25
2"	108	117	116	155	20	67	265	25
2 1/2"	146	147	127	190	25	84	540	20
3"	170	171	156	225	28	99	873	20
4"	200	202	170	270	30	124	1390	20

