

# CHECK VALVE

**Stainless steel disc with threaded connections NP 25**

**Art. 077.0001**



**Art. 077.0001**

**Execution:** 304 printed stainless steel body, pivot and shutter - spring in AISI 304 - Seeger ring in viton - sleeve connections gas threaded.

**Diameters:** 3/4" ÷ 4"


Max pressure 25 bar

Working temperature -20°C +150°C (viton)

Working temperature -20°C +200°C (PTFE)

**Employments:** hydrocarbons - steam - thermal plants.  
Installation in any position.

**On request:** execution in AISI 316 - flanged connections DIN 2633 - stainless steel rack - seal ring in PTFE.

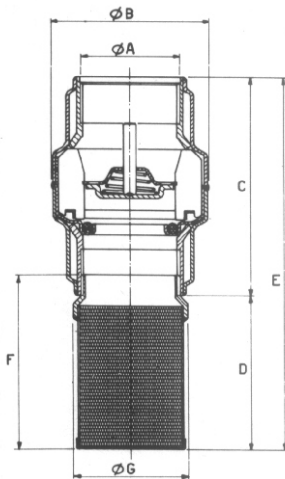

**Art. 077.0001**  
with stainless steel  
grasping rack

## Sizes

A	B	C	E	D	F	G	Opening pressure
3/4"	42	69	52	121	60	32	0.025
1"	52	77	58	135	68	43	0.025
1L"	67	97	62	155	72	47.5	0.025
1"	77	100	72	172	82	52	0.025
2"	86	118	84	202	96	64	0.020
2"	108	130	97	227	109	84	0.015
3"	128	133	112	252	126	97	0.015
4"	163	167	127	294	141	120	0.010

