


CHECK VALVE

Brass and bronze disc threaded connections


Art. 019.0100 Brass NP 12/25



Art. 019.0100

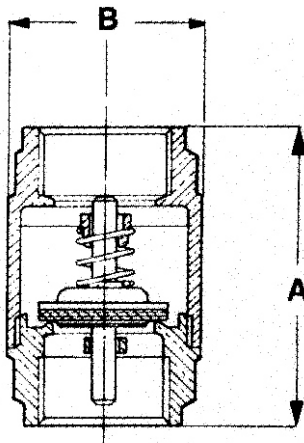

Sec.Art. 019.0100



Sec.Art. 020.1140

Execution: brass printed body OT 58 - stainless steel pan AISI304 - seal in nitrile gum NBR 65 SH/PS - cap and pivot brass guide OT 58 - stainless steel spring 18/8 - gas threaded sleeve connections

Diameters: 1/4" ÷ 4"

Working pressure from 12 bar to 25 bar

Working temperature -20°C +110°C (air)

Working temperature 0°C +90°C (water)

Employments: hot and cold water - various oils - compressed air. Installation in any position.

On request: execution for temperatures until 140°C - stainless steel rack 304 L/nylon 6.6

Sizes			
Ø	A	B	Pressure bar
3/8"	54	34.5	25
1/2"	57	34.5	25
3/4"	64	41.5	25
1"	75	48	25
1 1/4"	82	60.5	18

Sizes			
Ø	A	B	Pressure bar
1"	93	71	18
2"	100	87	18
2 1/2"	120	120	12
3"	140	140	12
4"	158	172	12

Art. 020.1140 Bronze NP 16

Execution: bronze body DIN 2.0401/ASTM B 455 - stainless steel disc, shutter and spring DIN 1.4571 - rail in alloyed steel DIN 1.4301.

Diameters: 1/2" ÷ 2"

Nominal pressure 16 bar

Min temperature -60°C

Max temperature 250°C (at 13 bar)

Employments: hot and cold water - steam - compressed air - steam condensate - gas. Installation in any position.

Sizes						
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	49	49	61	61	72	72
D	39	39	60.5	60.5	80	80

