

GATE VALVE

Brass light NP 10

Art. 061.0215

Execution: brass body, stem, bolt, disc, stem lock and stuffing box OT 58 UNI 5705-65 - body gasket in guarantal fibre- stem gasket in dutral EPDM 90 - steel plasticized plate handwheel with red epoxy resin - handwheel nut in galvanized steel - sanded surface - female threaded ends ISO 228/1.

Diameters: 1/4" ÷ 6"

Max pressure 10 bar


Max temperature 100°C

Characteristics: in spite of being named "light type", to better understand its characteristics from the economic side, it is not lacking in its structure. The performance is characterized by a slim and smart figure which fully satisfies the kind of customer who wants to address at this kind of product.

Employments: heating plants - water plants - sanitary.

Sizes


Ø	L	H	K	F	I
1/4"	33	67	45	11	8
3/8"	33	67	45	13	8
1/2"	35	68	45	13.5	9
3/4"	39	68	45	15.5	9
1"	43	80	50	19	10
1 1/4"	48	86	55	27	10
1 1/2"	54	107	60	33	11
2"	58	134	70	45	12
2 1/2"	64	175	100	60	13
3"	74	200	100	72	14
4"	84	235	120	93	16
5"	107	300	140	117	20
6"	113	360	170	143	21




G.OGRINC
katalog strojne
instalacije



Art. 061.0215

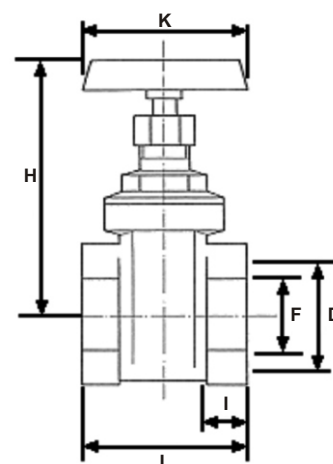

Sec.Art. 061.0215



G.OGRINC d.o.o.

Tel.01 361 50 44, Fax.01 361 16 00, e-pošta.gogrinc@siol.net, splet.www.g-ogrinc.si

