

# GATE VALVE

## Cast iron flat body soft seated NP 16

**Art. 085.0400**

**Execution:** nodular cast iron body and bonnet GGG40 - steel stem - nodular cast iron wedge GGG40 rubber covered NBR - seal O-Ring and EPDM body/bonnet gasket - brass stem CuZn39AlFeMn - fasteners non protruding socket screws in permanent plastic anticorrosive mastic - painted plate handwheel - body protection and bonnet painted with epoxy resins - full bore - flanged ends ISO NP 16.

**Diameters: ND 40 ÷ ND 300**

Max pressure 16 bar


Max temperature 70°C

**Employments:** water plants - conditioning - aqueducts.


**On request:** EPDM wedge covering - flanged ends ISO NP 10 - stem and protection pipe for subsoil application.

### Sizes


ND	L	H	D1	Dz	Do	do	N°holes	S
40	140	233	88	150	110	18	4	14
50	150	240	102	165	125	18	4	14
65	170	277	122	185	145	18	4	17
80	180	300	138	200	160	18	8	17
100	190	339	158	220	180	18	8	19
125	200	376	188	250	210	18	8	19
150	210	438	212	285	240	22	8	24
200	230	512	268	340	295	22	12	24
250	250	611	320	405	355	26	12	27
300	270	686	378	460	410	26	12	27




G.OGRINC  
katalog strojne  
instalacije

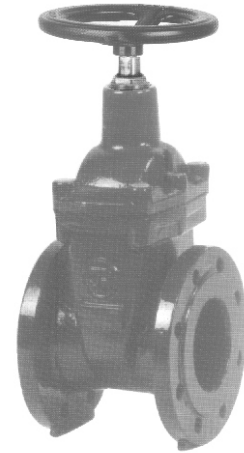

**Art. 085.0400**

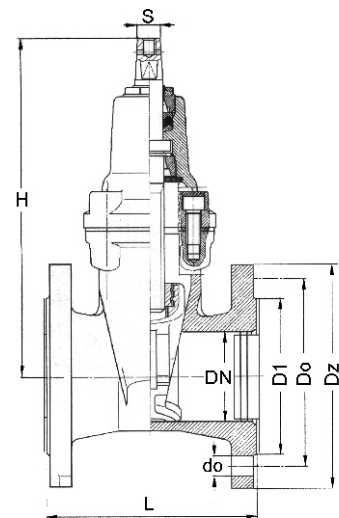

**Sec.Art. 085.0400**



G.OGRINC d.o.o.

Tel.01 361 50 44, Fax.01 361 16 00, e-pošta.gogrinc@siol.net, spletna stran www.g-ogrinc.si

